	Name(s)	
Pair #2	Name(s)	

MAKE -UP BAG INSTRUCTION SHEET

SUPPLIES NEEDED:

11" x 18" Fabric

Small Paper Bag

Pattern

Pins

Tape Measure


Shears

Zipper (put your name on it)

- 1. Select a partner for cutting. Be prepared to partner with another pair for fabric exchange.
- 2. Put your name and class period in the center of each pattern piece.
- 3. Separate the pattern pieces by cutting them apart. Leave piece #18 together. We will cut these apart later. <u>DO NOT CUT ON THE BLACK LINE.</u>

PATTERN LAYOUT

- 4. Place two different pieces of fabric RST matching fabric edges. ____tp*
- 5. Lay pattern pieces on fabric according to the following layout. See class sample and demonstration about grain.

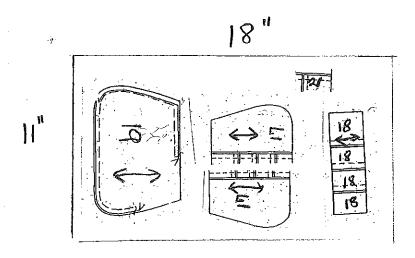

		Name	-	eriod_	- 103.52, 50, 5 0
Makenn	hag	instructions			

CUT THE FOLLOWING:

Cut 1 piece 19 (back)

Cut 2 piece 17(front)

Cut 4 piece 18(squares)

Cut 2 piece 21(zipper tab)

Cut one strap 3 inches by 9 inches

Cut 2 piece 19 (lining)

Select zipper

	Pin pattern pieces onto fabric according to sample. Make sure easure your <i>GRAINLINE</i> .	∍ you tp*
6.	DO NOT CUT UNTIL IT HAS BEEN APPROVED FOR CUCUT pattern pieces out using sharp shears. DO NOT REMOV	
7.	Mark DARTS. See class demonstration.	tp*
8.	Cut piece #18 apart so that there is 4-squares.	
9.	EXCHANGE FABRIC WITH ANOTHER PAIR OF STUDE	NTS.
C1.		


MAKE-UP BAG PIECES

1-#19 BACK 2-#17 FRONT 4-#18 SQUARES 2-#21 ZIPPER TAB 1-7" Zipper TO BE CUT: 2-#19 LINING 1-STRAP 3"x9" optional

Place all fabric pieces in a bag with your name on it.

Stitch using 3/8" (1cm) seams unless otherwise indicted. So Tii

- 1. With RIGHT sides together stitch front patch together, as shown. Press seams in one direction.
- With RIGHT sides together, stitch front to side edge of patch strip. Press seam allowances toward front.
- Apply fusible interfacing to WRONG side of front, following Pin padding over interfacing, having raw edges even. Machine-baste raw edges together. manufacturer's directions.

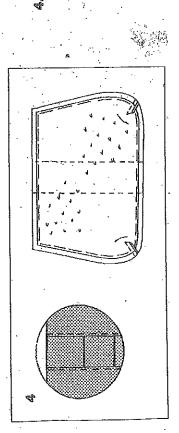



To reduce bulk, trim away padding close to basting.


On OUTSIDE, top-stitch front along seams. Make darts on each front. To reduce bulk, trim dart seam allowances close to stitching. Press dart to one side.

Prepare back same as front, disregarding patchwork.

O



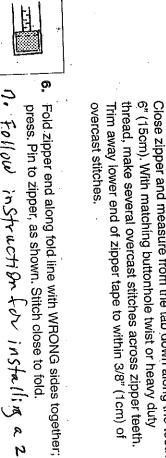




- ço Press under 3/8" (1cm) on upper edges of front and back. With zipper face up, pin pressed edges of front and back a scant 1/4" (6mm) from zipper teeth, having raw edges even. Pin padding to WRONG side of strap, having raw edges pressed edges. Using an adjustable zipper foot, stitch front and back close to Machine-baste raw edges. To reduce bulk, trim away padding
- With RIGHT sides together, pin strap to lining, having raw edges even. Stitch long edges. Trim seams.


close to basting.


long edges and along center of strap:

10. Turn strap; press. On OUTSIDE, top-stitch 1/8" (3mm) from

bost tutorial 60 (2.1) DSOW like my Man.








On OUTSIDE, pin strap to bag, as shown, centering over large dot, having raw edges even. Baste. 12. Open zipper. Fold bag in half, with RIGHT sides together, matching dart seams and having raw edges even. Stitch


sides and lower edges. Trim seam; clip curves.


Turn bag; press.


1. Fold strap in half, having raw edges even. Baste across ends,


- 13. Apply fusible interfacing to WRONG side of lining sections, following manufacturers directions. Make darts at lower
- matching dart seams and having pressed edges even, Trim With RIGHT sides together, stitch lining sections together, Press under 3/8" (1cm) on upper edges of lining. seam; clip curves.





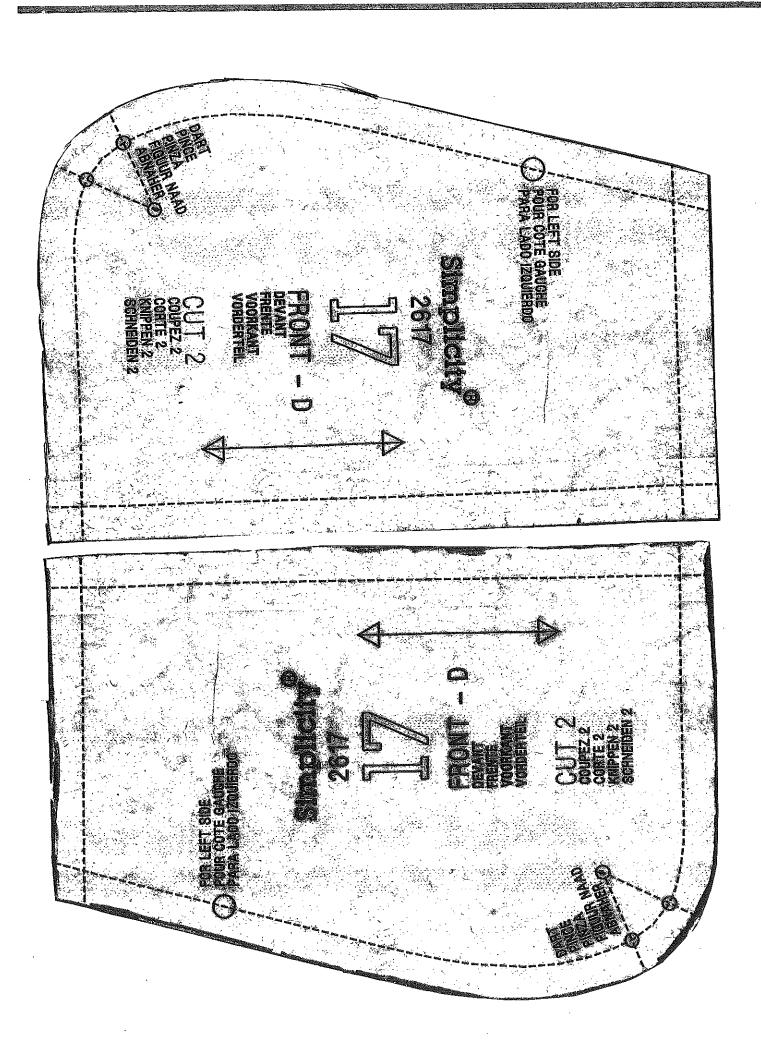

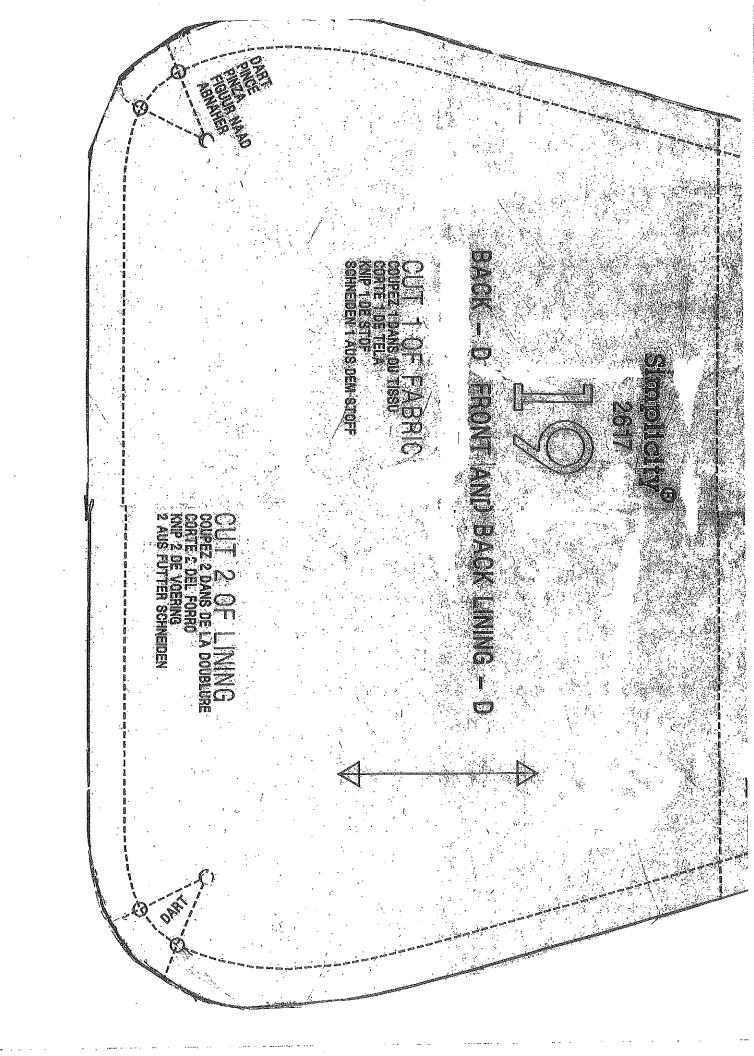

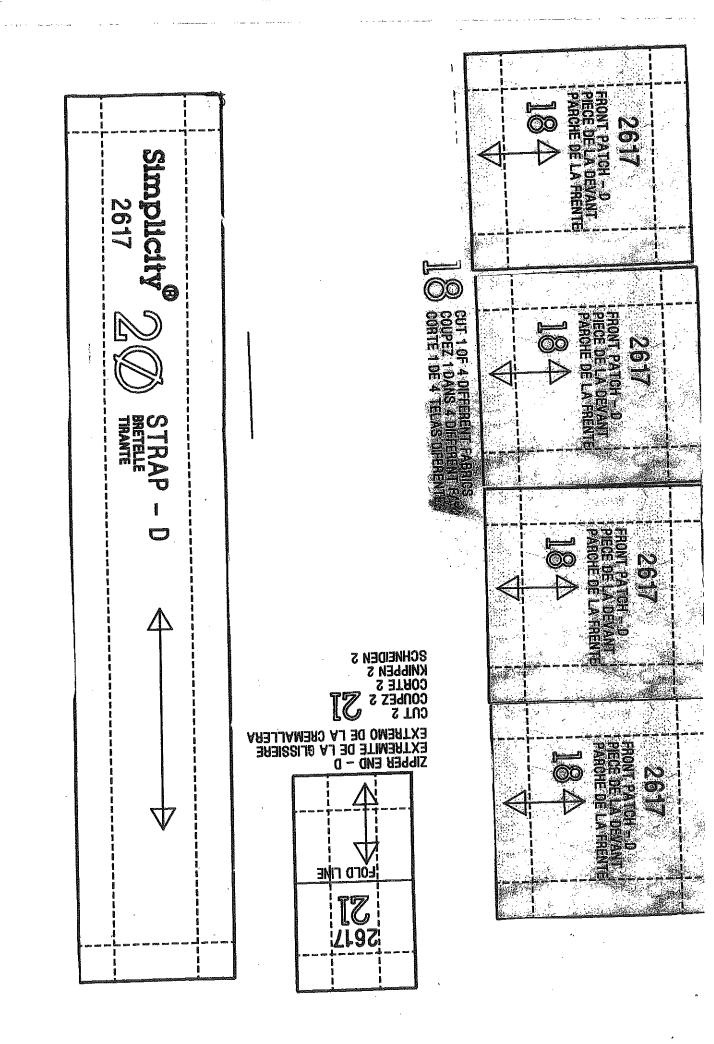

Name	Per	riod		
	Points Earned			
•	Points Possible	135+		

Make-up Bag Evaluation Sheet

Standard for evaluating your work are listed below. Rate your make-up bag on a scale of 0 to 5 with 5 being the highest. Read each of the following standards and circle your score.

Step 1-8	Guide sheet dated and signed off	£. 0	2	4	6	8	10
Step 9	Seam at lower edge of bag even	0	1	2	3	4	, 5
Бтор У	Tension is correct	0	1	2	3	4	5
Step 10	Deco Design on Bag		10	15	ext	extra credit	
Stop 11	Top edged of bag pressed under	0	1	2	3	4	5
Step 11 Step 12	Zipper stitched evenly	0	1	2	3	4	5
Step 12	Backstitched at end of zipper	0	1	2 .	3	4	5
	Fabric at zipper teeth	0	1	2	3	4	5
	Stitching on fold of fabric	0	1	2	3	4	5 5
Step 13	Bottom of bag at lower edge	0	1	2	3	4	5
5tcp 15	Tension is correct	0	1	2	3	4	5
	Side seam even and press open	0	1	2	3	4	5
	Tension is correct	0	1	2	3	4	5
Lining							
Step 14	Sides stitched to bottom	0	1	2	3	4	5
Step 15	Side seam of lining	0	1	2	3	4	5
1	Tension is correct	0	1	2	3	4	5
Step 16	Corners stitched evenly	0	1	2	3	4	5
Step 17	Lining press 5/8" at top edge	0	1	2	3	4	5
Step 18	Wrong side of lining to Bag	0	1	2	3	4	5
Step 19	Topstitching next to zipper	0	1	2	3	4	5 5
-	Tension is correct	0	1_	2	3	4	5
Guide she	eet checked off and submitt	ed with	Evalu	ation	Shee	t	
	0	5	10		15		20
All thread	s cut	0	1	2	3	4	5
Bag neat and pressed			1	2	3	4	5